

HELULIGHT® CLASSIC-PLUS 840



Art. Nr. 11029459
 ID 1-000000-07559
 EAN Nr. 4260654164992


Normen / Norms

DIN EN 60598-1 :2021/A11:2022 DIN EN 60529 :1991/A2:2013/AC:2019-02
 DIN EN 55015:2019+A11:2020 DIN EN IEC 63000:2018
 DIN EN 61547:2009
 DIN EN 62471:2009




Elektrische Rahmenbedingungen / Electrical characteristic

Netzanschluss / Main Supply	12-30 VDC
Leistung / Power	20,6 W
Dimmbar / Dimmable	0-10V
Anschluss / Connection Type	M8, 4-Pol, A-Cod.
Durchschleifbar / Loopthrough	Nein / No
Pinbelegung / Pin assignment	+D 2 4 NC +WH 1 3 -GND

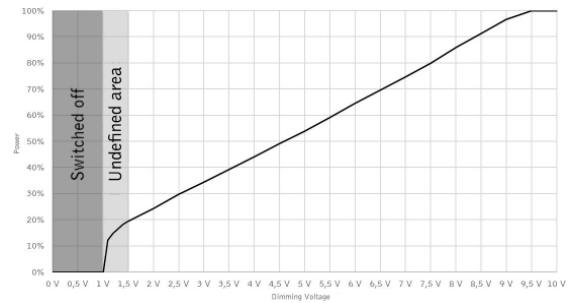


Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	5700 K
Lichstrom(Brutto) / Lum. Flux(Gross)	3171 lm
Lichstrom(Netto) / Lum. Flux(Net)	2458 lm
Effizienz(Brutto) / Efficiency(Gross)	154 lm/W
Effizienz(Netto) / Efficiency(Net)	119 lm/W
Abstrahlwinkel / Beam Angle	120°
Farbtreue / Colour Rendering	RA / CRI >80
Photobiological Safety	RG-1

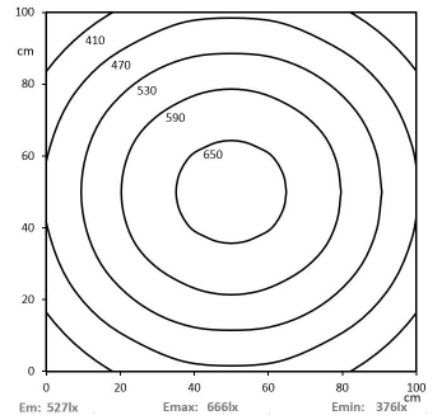

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Diff.
Drehbar / Rotatable	Ja / Yes
Gewicht(Netto) / Weight(Net)	0,48 kg
Betriebstemperatur / Operating Temp.	-20°C / +50°C
Lebensdauer / Lifetime	min. 60000 h
Befestigung / Fastening	2x Endhalter / 2x Brackets

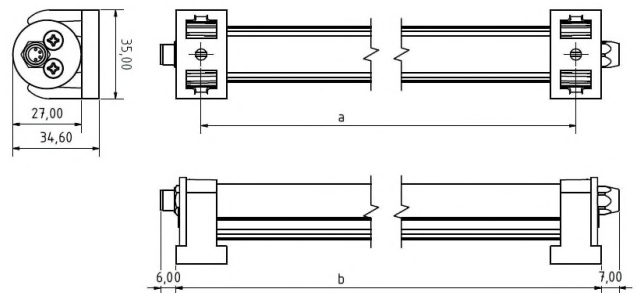

a = 850mm b = 866,5mm

*Technische Änderungen vorbehalten | technical modifications reserved