

HELULIGHT® CLASSIC-RGBW 560D



Art. Nr. 11024060

ID 1-000000-06633

EAN Nr. 4260654160697

Normen / Norms

DIN EN 60598-1 :2021/A11:2022

DIN EN 60529 :1991/A2:2013/AC:2019-02

DIN EN 55015:2019+A11:2020

DIN EN IEC 63000:2018

DIN EN 61547:2009

DIN EN 62471:2009




Elektrische Rahmenbedingungen / Electrical characteristic

Netzanschluss / Main Supply	24 VDC
Leistung / Power (W R G B)	11,5W 6,2W 5,2W 5,2W
Dimmbar / Dimmable	PWM
Anschluss / Connection Type	M8, 5-Pol, B-Cod.
Durchschleifbar / Loopthrough	Ja / Yes
Pinbelegung / Pin assignment	


Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	5700 K
Lichstrom(Brutto) / Lum. Flux(Gross)(W R G B)	1704lm 249lm 662lm 175lm
Lichstrom(Netto) / Lum. Flux(Net)(W R G B)	1372lm 195lm 488lm 141lm
Effizienz(Brutto) / Efficiency(Gross)(W)	148lm/W
Effizienz(Netto) / Efficiency(Net)(W)	119lm/W
Abstrahlwinkel / Beam Angle	120°
Farbtreue / Colour Rendering	RA / CRI >80
Photobiological Safety	RG-1

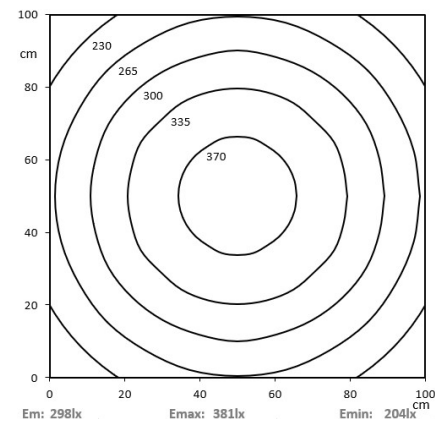

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Diff.
Drehbar / Rotatable	Ja / Yes
Gewicht(Netto) / Weight(Net)	0,33 kg
Betriebstemperatur / Operating Temp.	-20°C / +50°C
Lebensdauer / Lifetime	min. 60000 h
Befestigung / Fastening	2x Endhalter / 2x Brackets

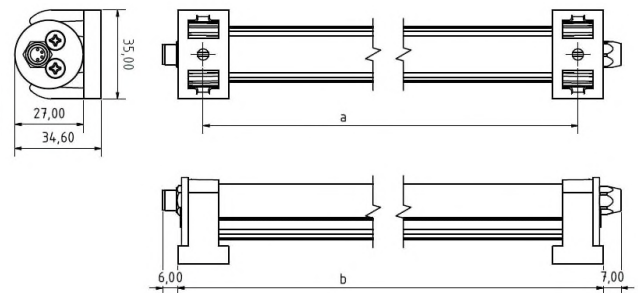

a = 570mm b = 586,5m

*Technische Änderungen vorbehalten | technical modifications reserved